
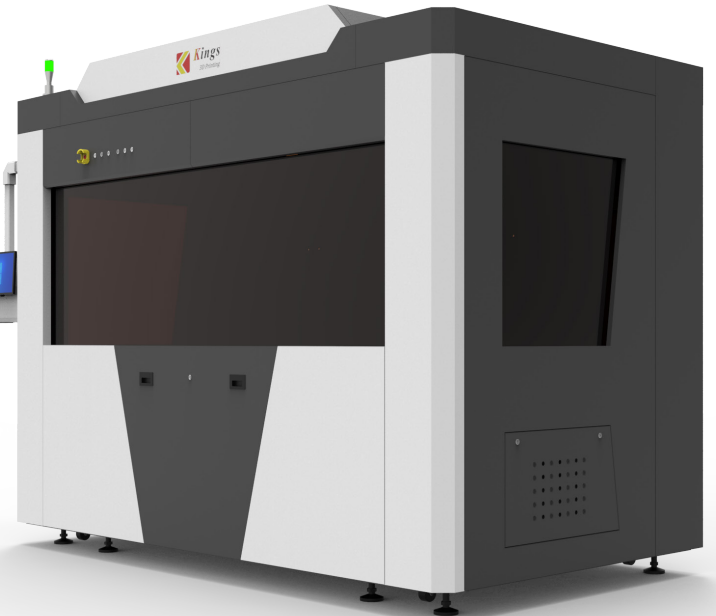
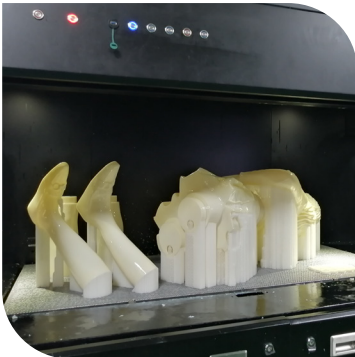


2700PRO (THREE LASERS)

Kings Industrial SLA 3D Printers

23 Innovative Technologies, High Speed SLA 3D Printing
Efficient and Cost-Effective Prototyping
Bring Your Idea into Reality

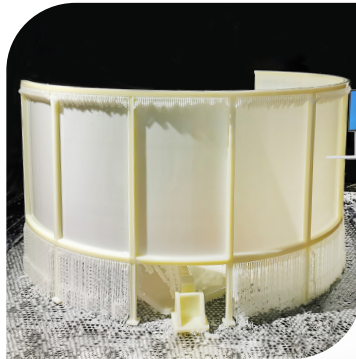

LARGE FORMAT SLA 3D PRINTER

Kings

◆ Overview

The Kings SLA 2700Pro sets a new standard in precision 3D printing. Built with a robust marble frame, high-grade ball screw rails, and advanced laser technology, it ensures unparalleled stability and accuracy. Designed for large-scale printing, it features silent motion, laser liquid level detection, and remote monitoring capabilities, ideal for diverse industrial applications with optimized resin materials.

◆ Advantage

• Enhanced Printing Efficiency

- Intelligent high speed scanning system, 15m/s
- Variable laser spot and variable power
- Automatic identifying upskin and downskin with differentiated parameters
- Different Parameter databases with different layer thickness

• Long-term Printing Stability

- Key components from international top brands
- Full marble structure for enhanced recoating and scanning stability
- High stiffness light recoater to ensure recoating accuracy and efficiency
- Compensation algorithm for multi-head system, ensuring uniform curing in the printing range

◆ Ideal Applications

- | | | | | |
|---|---|--|---|---|
|  Shoe Mold Manufacturing |  Prototyping |  Architecture |  Sculpture |  Medical |
|  Dental |  Military |  Automotive |  Animation |  Electronics |

LARGE FORMAT SLA 3D PRINTER

Kings

◆ Technical Data

Max Printing Size	2700*900*800mm
Machine Size	351cm(W)*196cm(D)*273cm(H)
Rated Power Consumption	3.0KVA
Machine Weight	3750kg
First Tank Resin	2650kg
Beam Size (diameter @1/e ²)	0.08-0.8mm(Variable beam sizes)
Max Scanning Speed	15.0m/s
Layer Thickness	0.05mm~0.2mm
Accuracy	±0.15(L≤100mm); ±0.15%*L(L>100mm)
Laser Type	Solid-state frequency tripled Nd: YV04
Wavelength	355nm
Power	Resin surface power≥300 mw
Variable Beam System	Galvo/Closed-loop
Main Structure	Marble recoater frame, marble elevator holder and marble scanning system base
Coating Mode	Intelligent position vacuum recoating
Vertical Resolution Ratio	0.0005mm
Repeat Positioning Accuracy	±0.01mm
Motion Control System	Closed-loop
Machine Control Software	KINGS 3D control software
Input Data File Format	STL/SLC
Operating System	Windows 10
Network Type and Protocol	Ethernet, TCP/IP
Electrical Requirement	200-240VAC 50/60Hz,single-phase,10A
Ambient Temperature	20-26°C(72-79F)
Relative Humidity	<40%, non-condensing
Machine Warranty	1 years (including laser)



Shenzhen Kings 3D Co., Ltd

- 📍 Building B, No. 148 Huanli Road, Yungu Community, Xinhua Street, Guangming District, Shenzhen, China.
- 📍 No.178, Dingxing Road, High-tech Zone, Zhuhai City, Guangdong Province

Web: www.kings3dprinter.com

Mob/Whatsapp: +86 17727416895

Email: market@kings3dprinter.com