


ABS-CF

/Acrylonitrile Butadiene Styrene/



- ✓ High Impact Resistance
- ✓ High Light Transmission
- ✓ Good Toughness
- ✓ Good Fluidity

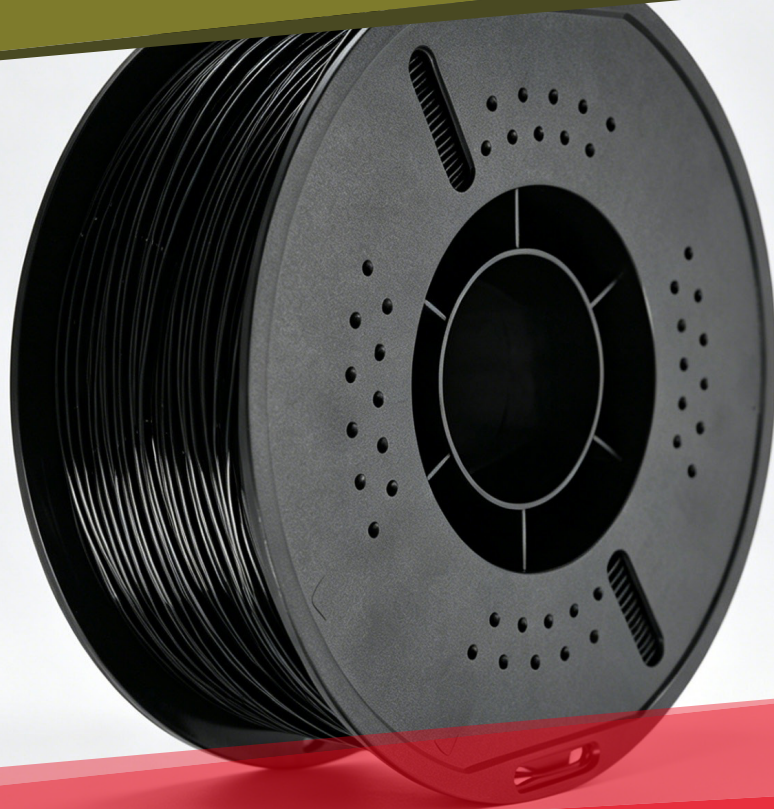

■ Material Overview

ABS-CF is an ABS-based composite reinforced with carbon fibers. It not only maintains the advantages of high strength and impact resistance but also offers reduced odor and lower shrinkage. Furthermore, it is resistant to warping and cracking during printing, enabling you to effortlessly create high-precision, high-quality 3D prints.



Filament Diameter	1.75mm/2.85mm/ 3.50mm
Net Weight	1KG \ Inner Box Dimension: 206*71*208mm \ G.W.: 1.35KG
Package	1KG*10PCs \ Outer Carton Dimension: 382*226*433mm \ G.W.: 14KG/CTN

■ Printing Tips

- Best printing temperature ranges from 240°C to 270°C
- Best phototype can be achieved through 50°C drying for 2-4 hours
- Print Temp: 240-255°C 50-100mm/s;
- Print Temp: 255-270°C 100-200mm/s
- Platform Temp.: 80-110°C
- Bubble: no bubble

■ Colors

 Black (Standardized pantone colors are available)

■ Data Table

Physical Properties	Standard Value	Test Method
Density	1.10g /cm ³	ASTM D792
MFR (240°C, 2.16KG)	5-7g / 10 minutes	ASTM D1238
Water absorption (saturation, 23°C)	0.3%	ASTM D570
Mechanical Properties	Standard Value	Test Method
Tensile strength	≥48 MPa	ASTM D638
Flexural strength	≥48 MPa	ASTM D638
Tensile modulus	≥5200 MPa	ASTM D638
Notch impact strength (IZOD, 23°C)	≥3KJ/m ²	ISO 180
Elongation at break	≥3.0%	ASTM D638
Accuracy	Standard Value	Test Method
Filament diameter	1.75mm/2.85mm/3.50mm	Q/WT 001-2014
Roundness deviation	≤0.02mm	Q/WT 001-2014