
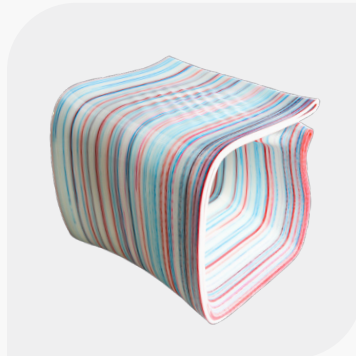


FGF-1200PRO

Kings Industrial FGF 3D Printers

Large Format, High Speed, and Pellets Printing Material

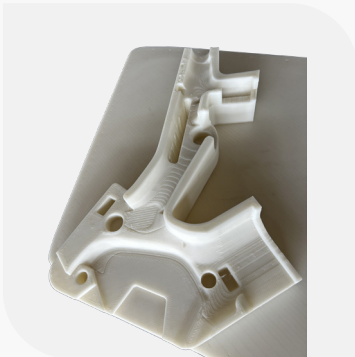

◆ Overview

Kings FGF-1200Pro is a large-format granular 3D printer with advantages of fast printing speed (max 10kg per hour) and large printing size. It uses granular and polymer composite materials for printing, which features great mechanical properties and strong durability, excellent cost-effectiveness and environmental friendliness. It is widely used for sculpture, theme park, movie prop, art craft, window display, public attraction, furniture, advertising, signage, mining, oil & gas and molding industries.

◆ Advantage

- Automatic feeding system
- Self-developed CNC control system
- Continuation of printing after the resumption from power off
- Using 18-bit high-precision servo motors with the mechanical accuracy of 0.01mm
- No belt design. The sealed dust-proof precision module to significantly enhance the lifespan of the components and the stability of the printing
- Supporting the use of composite materials as the base on the aluminum alloy printing platform, and achieving ABS and PETG+GF printing without printing bed heating

◆ Ideal Applications

- It is widely used for sculpture, theme park, movie prop, art craft, window display, public attraction, furniture, advertising, signage, mining, oil & gas and molding industries.



◆ Technical Data

Molding technology	Fused granular fabrication
Molding dimensions	(L*W*H) 1200*1000*1000mm
Machine dimensions	(L*W*H) 1990*1895*2250mm
Optional nozzle diameter	2-6mm
Nozzle heating method	Three-zone intelligent heating
Storage hopper volume	40kg
Drive mode	Servo motor
Rated power	9.2kW
Average power	2.1kW
Machine weight	950kg
Working surface temperature	≤120 degrees celsius
Printing bed	Aluminum/Composite Plastic/Glass
The maximum temperature of the nozzle	≤350 degrees celsius (450 degrees celsius is optional)
Printing connection method	SD/USB/Wi-Fi
Slicing supported formats	STL/OBJ/AMF/3MF/STP/STEP
Compressed air pressure	0.6MPa
Material particle diameter	1-5mm
Automatic feeder	Integrated
Power supply voltage	Single-phase AC 220V±10%
Rated current	41.8A
Frequency	50/60HZ
Displacement	200 liters/minute
Granular dryer	50kg tank/4.5KW/220V±10%/20.5A/50 or 60HZ/Single phase/0.6Mpa/200L per min
Materials	ABS/ABS Fire Retardant/ABS+GF/ABS+CF/PETG/PETG Fire Retardant/PETG+GF/PLA/ASA/ASA+GF/TPU/PC/PA/PP/HDPE/TPV/EVA/PPS+GF/PA+CF/PC+CF/PEI+CF etc.

